

FORM PTO-1390 REV. 5-93		US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEYS DOCKET NUMBER <b>P00,1993</b>
<b>TRANSMITTAL LETTER TO THE UNITED STATES          DESIGNATED/ELECTED OFFICE (DO/EO/US)          CONCERNING A FILING UNDER 35 U.S.C. 371</b>			U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <b>09/763772</b>
INTERNATIONAL APPLICATION NO. <b>PCT/DE99/01949</b>	INTERNATIONAL FILING DATE 1 July 1999	PRIORITY DATE CLAIMED 25 August 1998	
TITLE OF INVENTION <b>"METHOD FOR TRAINING A NEURAL NETWORK, METHOD FOR CLASSIFYING A SEQUENCE OF          INPUT PARAMETERS USING A NEURAL NETWORK, NEURAL NETWORK AND ARRAY FOR          TRAINING A NEURAL NETWORK"</b>			
APPLICANT(S) FOR DO/EO/US <b>Gustavo DECO AND Bernd SCHÜRMANN</b>			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay. 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of International Application as filed (35 U.S.C. 371(c)(2)) a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3)) a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <b>Items 11. to 16. below concern other document(s) or information included:</b> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; (PTO 1449, Prior Art, Search Report). 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. <b>(SEE ATTACHED ENVELOPE)</b> 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input checked="" type="checkbox"/> A substitute specification & marked up version of application. 15. <input checked="" type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: a. <input checked="" type="checkbox"/> Submittal of Drawings b. <input checked="" type="checkbox"/> <b>EXPRESS MAIL #EL 655301196US, dated February 26, 2001.</b>			

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.10)

09/763772

INTERNATIONAL APPLICATION NO.

PCT/DE99/01949

ATTORNEY'S DOCKET NUMBER

P00,1993

17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5):**

Search Report has been prepared by the EPO or JPO ..... \$860.00

International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) .. \$700.00

No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but  
international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)) ..... \$770.00Neither international preliminary examination fee (37 C.F.R. 1.482) nor international  
search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO ..... \$1040.00International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all  
claims satisfied provisions of PCT Article 33(2)-(4) ..... \$ 96.00**ENTER APPROPRIATE BASIC FEE AMOUNT =**

CALCULATIONS

PTO USE ONLY

\$ 860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months  
from the earliest claimed priority date (37 C.F.R. 1.492(e)).

\$

Claims

Number Filed

Number  
Extra

Rate

Total Claims

16 - 20 =

X \$ 18.00

\$

Independent Claims

4 - 3 =

1

X \$ 80.00

\$ 80.00

Multiple Dependent Claims

\$270.00 +

\$

**TOTAL OF ABOVE CALCULATIONS =**

\$ 860.00

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must  
also be filed. (Note 37 C.F.R. 1.9, 1.27, 1.28)

\$

**SUBTOTAL =**

\$ 940.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months  
from the earliest claimed priority date (37 CFR 1.492(f)).

\$

**TOTAL NATIONAL FEE =**

\$ 940.00

Fee for recording the enclosed assignment (37 C.F.R. 1.21(h). The assignment must be  
accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property

+

**TOTAL FEES ENCLOSED =**

\$ 940.00

Amount to be  
refunded

\$

charged

\$

a. ☒ A check in the amount of \$ 940.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees. A  
duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 501519. A duplicate copy of this sheet is enclosed.NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be  
filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Schiff Hardin & Waite  
Patent Department  
6600 Sears Tower  
Chicago, Illinois 60606

SIGNATURE

Melvin A. Robinson

NAME

31,870

Registration Number

CUSTOMER NO. 26574

**"PRELIMINARY AMENDMENT"**

An amended substitute specification is attached, and a marked up copy of the original specification showing the changes is also enclosed.

**IN THE CLAIMS**

Amend the claims as shown in the following replacement claims, the marked up version of which is attached following the marked up specification.

**We Claim:**

- 5           1. A method for training a neural network that contains pulsed neurons,
- a)       training the neural network for a first time span such that a discrimination
- value is maximized, as a result whereof a maximum first discrimination
- value is formed;
- b)       forming the discrimination value dependent on pulses that are formed by
- 10       the pulsed neurons within the first time span as well as on a training
- sequence of input quantities that are supplied to the neural network;
- c)       implementing the following steps interactively:
- shortening the first time span to form a second time span,
- forming a second discrimination value for the second time span,
- 15       when the second discrimination value is the same as the first
- discrimination value, then performing a new iteration with a new second
- time span that is formed by shortening the second time span of the
- preceding iteration,
- otherwise, ending the method and the trained neural network is the neural
- 20       network of the last iteration wherein the second discrimination value is the
- same as the first discrimination value.

2. A method according to claim 1, wherein an optimization method that is not gradient based is utilized for the maximization of at least one of the first discrimination value and of the second discrimination value.

3. A method according to claim 2, wherein the optimization method is based on the ALOPEX method.

4. A method according to claim 1, whereby the first discrimination value  $I(T)$  satisfies the following rule:

$$I(T) = I \left( s; \left\{ \begin{array}{l} t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \\ t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \end{array} \right\} \right),$$

5 wherein

- $s$  references the input quantities,
- $t_m^{(n)}$  references a pulse that is generated by a pulsed neuron  $n$  at a time  $m$  within a time span  $[0, T]$ ,
- $k_n$  ( $n = 1, \dots, N$ ) references a point in time at which the pulsed neuron  $n$  has generated the last pulse within the time span  $[0, T]$ , and
- $N$  references a plurality of pulsed neurons contained in the neural network.

5. A method according to claim 4, wherein the first discrimination value  $I(T)$  satisfies the following rule:

$$I(T) = -\int p(\text{out}) \cdot \ln(p(\text{out})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} + \\ + \sum_{j=1}^S p_j \int p(\text{out}|s^{(j)}) \cdot \ln(p(\text{out}|s^{(j)})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)}$$

with

$$p(\text{out}) = \sum_{j=1}^S p_j p(\text{out}|s^{(j)}),$$

wherein

- $s^{(j)}$  references an input quantity that is applied to the neural network at a time j,
- $p_j$  references a probability that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time j,
- $p(\text{out}|s^{(j)})$  references a conditioned probability that a pulse is generated by a pulsed neuron in the neural network under the condition that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time j.

6. A method according to claim 1, wherein the training sequence of inputs quantities are is of measured physical signals.

7. A method according to claim 6, wherein the training sequence of input quantities is signals of an electroencephalogram.

8. A method for classification of a sequence of input quantities upon employment of a neural network that contains pulsed neurons and was trained, comprising to the following steps:

- a) training the neural network for a first time span such that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) forming the discrimination value dependent on pulses that are formed by the pulsed neurons within a first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) implementing the following steps interactively:  
shortening the first time span to form a second time span,  
forming a second discrimination value for the second time span,  
when the second discrimination value is the same as the first discrimination value, then performing a new iteration with a new second time span that is formed by shortening the second time span of the preceding iteration,  
otherwise, ending the method and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value,
- supplying the sequence of input quantities to the neural network; and  
forming a classification signal that indicates what kind of sequence of input quantities the supplied sequence is.

9. A method according to claim 9, wherein the training sequence of input quantities and the sequence of input quantities are measured physical signals.

10. A method according to claim 9, wherein the training sequence of input quantities and the sequence of input quantities are measured signals of an electroencephalogram.

11. A neural network that contains pulsed neurons has been trained according to the following steps:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

12. A neural network according to claim 10, wherein the network is utilized for classification of a physical signal.

13. A neural network according to claim 10, utilized for the classification of an electroencephalogram signal.

14. An arrangement for training a neural network that contains pulsed neurons comprising:

a processor that is configured such that the following steps implemented:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- 5 b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - 10 a second discrimination value is formed for the second time span, when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration, and
  - 15 otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

15. An arrangement according to claim 14, wherein the network is utilized for the classification of a physical signal.


20 16. An arrangement according to claim 14, wherein the network is utilized for the classification of a signal of an electroencephalogram.

**REMARKS**

The foregoing amendments to the specification and claims under Article 41 of the Patent Cooperation Treaty place the application into a form for prosecution before the U.S. Patent and Trademark Office under 35 U.S.C. §371.

5 Accordingly, entry of these amendments before examination on the merits is hereby requested.

Respectfully submitted,



Melvin A. Robinson (reg. no. 31,870)  
Schiff Hardin & Waite  
Patent Department  
6600 Sears Tower  
Chicago, Illinois 60606  
Telephone: 312-258-5785

ATTORNEY FOR APPLICANT

**CUSTOMER NO. 26574**

4/PRTS

09/763772  
JC02 Rec'd PCT/PTO 26 FEB 2001

Sub Spec  
**SPECIFICATION**

**TITLE**

**METHOD FOR TRAINING A NEURAL NETWORK, METHOD FOR  
THE CLASSIFICATION OF A SEQUENCE OF INPUT QUANTITIES  
5 UPON EMPLOYMENT OF A NEURAL NETWORK, NEURAL  
NETWORK AND ARRANGEMENT FOR THE TRAINING  
OF A NEURAL NETWORK**

**BACKGROUND OF THE INVENTION**

**Field of the Invention**

10 The present invention is directed to a method for training a neural network, to  
a method for the classification of a sequence of input quantities upon employment of a  
neural network as well as to a neural network and an arrangement for training a neural  
network.

**Description of the Related Art**

15 A neural network comprises neurons that are at least partially connected to one  
another. Input neurons of the neural network are supplied with input signals as input  
quantities supplied to the input neurons. The neural network usually comprises a  
plurality of layers. A respective neuron generates a signal dependent on input  
quantities supplied to a neuron of the neural network and on an activation function  
20 provided for the neuron, the signal being in turn supplied to neurons of a further layer  
as an input quantity according to a prescribable weighting. An output quantity  
dependent on quantities that are supplied to the output neuron of neurons of the  
preceding layer is generated in an output neuron in an output layer. There are  
currently essentially two approaches in view of the questions as to the form in which  
25 information is stored in a neural network.

A first approach assumes that the information in a neural network is encoded  
in the spectral domain. Given this approach, a chronological sequence of input  
quantities is encoded such that a respective input neuron is provided for each time row  
value of a chronological sequence of the input quantities, the respective time row  
30 value being applied to this input neuron.

Given a neural network that is designed according to this approach, a hyperbolic tangent (tanh) is usually employed as an activation function.

This first type of neural network is referred to below as a static neural network.

What is particularly disadvantageous about this approach is that it is not  
5 possible with a static neural network to explicitly consider a dynamics of a process subject to a technical system in the internal coding of the sequence of input quantities.

The Time Delay Neural Networks (TDNN) known from German Patent Document DE 195 31 697 C2 attempt to counter this disadvantage in that, given a plurality of sequences of input quantities, a respective input neuron is provided for  
10 each sequence and for each time row value. This approach particularly exhibits the disadvantage that the dimension of the input space -- represented by the plurality of input neurons -- increases exponentially with an increasing plurality of different sequences of input quantities to be taken into consideration.

An increasing plurality of neurons in the neural network, moreover, involves  
15 an increased training outlay upon employment of a plurality of training data that increases with an increasing plurality of neurons. A training of a static neural network becomes highly calculation-intensive under these conditions or, respectively, can practically no longer be implemented.

A gradient-based training method, for example the back-propagation method,  
20 is usually utilized for training a static neural network.

The publication by Unnikrishnan, et al., "Alopex: A Correlation-Based Learning Algorithm for Feedforward and Recurrent Neural Networks", also discloses a training method for a static neural network that is referred to as the ALOPEX method. In this method, the training of a static neural network is viewed as an  
25 optimization problem. In this case, the goal of the optimization is a minimization of a error criterion E taking weightings that are present in the static neural network and with which the connections between neurons are weighted into consideration for a predetermined training data set with training data.

A training datum is a tuple that has input quantities, for example state quantities of a technical system or, respectively, boundary conditions that a technical system is subject to and that are supplied to a technical system as well as an output quantity determined under the boundary conditions and that the technical system  
 5 forms for the input quantities.

The ALOPEX method shall be explained in greater detail later in conjunction with the exemplary embodiment.

A second approach can be seen therein that the information about a system is encoded in the time domain and in the spectral domain. An artificial neural network  
 10 that does justice to this approach comprises what are referred to as pulsed neurons and is known from the publication by Gerstner, "Time Structure of the Activity in Neural Networks Models".

According to the publication by Deco et al., "Information Transmission and Temporal Code in Central Spiking Neurons", a pulsed neuron is modelled such that  
 15 the behavior of a pulsed neuron with respect to an external stimulation, which is referred to below as an input quantity, is described by a stochastic differential equation of the Itô type according to the following rule:

$$dV(t) = \left( -\frac{V(t)}{\tau} + \mu \right) dt + \sigma dW(t) + w dS(t). \quad (1)$$

In the rule (1),  $dW(t)$  references a standard Wiener process. A predetermined constant  $\tau$  describes a delay of a membrane potential  $V(t)$  of the modelled neuron  
 20 without an input quantity that is adjacent at the neuron. The model simulates the behavior of a biological neuron. For this reason, a pulsed neuron is also referred to as a biologically oriented neuron.

Further,  $S(t)$  references a coupling of the neuron with another neuron, i.e. the following applies:

$$s(t) = \frac{d}{dt} S(t) = \sum_i \delta(t - t_i), \quad (2)$$

whereby  $t_i$  references an arrival time at which an external impulse arrives at an input of a neuron. A soma-synaptic intensity is modelled by a synaptic quantity  $w$ .

In this model, the pulsed neuron generates a pulse when the membrane potential  $V(t)$  reaches a predetermined threshold  $\Theta$ . After the pulse is generated, the membrane potential  $V(t)$  of the neuron is reset to a predetermined initialization potential value  $V(0)$ .

A time sequence of pulses is thus described according to the following rule:

$$t'_0, \dots, t'_k, \dots, \quad (3)$$

and satisfies the following rule:

$$o(t) = \sum_k \delta(t - t'_k). \quad (4)$$

It is also known from the afore-mentioned Deco et al. publication that, given the assumption of the above-described model for a pulsed neuron, a discrimination value  $I(T)$  can be formed that indicates the dependability with which a sequence of input quantities is correctly classified in view of the training data employed for a training of the neural network.

The discrimination value  $I(T)$  is dependent on pulses that are formed by the pulsed neurons within a time span  $[0; T]$  as well as on a training sequence of input quantities that are supplied to the neural network. The discrimination value  $I(T)$  satisfies the following rule:

$$I(T) = I \left[ s; \left\{ \begin{matrix} t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \\ t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \end{matrix} \right\} \right], \quad (5)$$

whereby

- $s$  references the input quantities,

- $t_m^{(n)}$  references a pulse that is generated by a pulsed neuron  $n$  at a time  $m$  within a time span  $[0, T]$ ,
- $k_n$  ( $n = 1, \dots, N$ ) references a point in time at which the pulsed neuron  $n$  has generated the last pulse within the time span  $[0, T]$ ,
- 5 •  $N$  references a plurality of pulsed neurons contained in the neural network.

A stochastic differential equation of the Itô type derives for a neural network with a plurality of  $N$  neurons described according to the following rule:

$$dV_i(t) = \left( -\frac{V_i(t)}{\tau} + \mu \right) dt + \sigma dW_i(t) + \sum_{j=1}^N w_{ij} \sum_k \delta(t - t_{k-\Delta_{ij}}^{(j)}) dt + I_i(t) dt, \quad (6)$$

whereby

- $V_i(t)$  references a membrane potential of the  $i^{\text{th}}$  neuron ( $i = 1, \dots, N$ ),
- 10 •  $N$  references a plurality of neurons contained in the neural network,
- $w_{ij}$  respectively references a weighting of a coupling between the  $i^{\text{th}}$  and the  $j^{\text{th}}$  neuron, clearly a synaptic intensity between the neurons  $i$  and  $j$ ,
- $\Delta_{ij}$  references a prescribable axonal delay of a signal between the neurons  $i$  and  $j$ ,
- 15 •  $I_i(t)$  references an external stimulation signal of the neuron  $i$ .

The German Patent Document DE 195 31 967C2 discloses a training method for a neural network. Given this method, the neural network is linked in a control circuit with the model of a technical system such that the neural network outputs at least one manipulated variable to the model as an output quantity, and the model  
20 generates at least one regulating variable from the manipulated quantity supplied by the neural network, the at least one regulating variable being supplied to the neural network as an input quantity. The regulating variable is superimposed with a noise having a known noise distribution before it is supplied to the model. As a reaction to the regulating variable modified by the impressed noise, the weightings of the neural

network are set as follows: A cost function evaluates whether the change in weighting at the network has effected an improvement of the regulating variable with respect to a rated behavior of the model, and such weightings are favored by the cost function.

### **SUMMARY OF THE INVENTION**

- 5           The present invention is based on providing a method as well as an arrangement for training a neural network having pulsed neurons. The invention is also based on providing a method for the classification of a sequence of input quantities upon employment of a neural network having pulsed neurons as well as specifying a neural network having pulsed neurons.
- 10           The problems are solved by the methods and the arrangement as well as by the neural network trained according to a method for training a neural network that contains pulsed neurons,
- a)       the neural network is trained such for a first time span  $[0; T]$  that a discrimination value is maximized, as a result whereof a maximum first
  - 15       discrimination value is formed;
  - b)       the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
  - c)       the following steps are interactively implemented:
    - 20       - the first time span is shortened to form a second time span,
    - a second discrimination value is formed for the second time span,
    - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
    - 25       - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

In the preferred method, an optimization method that is not gradient based is utilized for the maximization of the first discrimination value and/or of the second discrimination value. The optimization method may be based on the ALOPEX method.

5 According to one aspect of the invention, the first discrimination value  $I(T)$  satisfies the following rule:

$$I(T) = I \left( s; \left\{ t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \right. \right. \\ \left. \left. t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \right\} \right),$$

whereby

- $s$  references the input quantities,
  - $t_m^{(n)}$  references a pulse that is generated by a pulsed neuron  $n$  at a time  $m$
  - 10 within a time span  $[0, T]$ ,
  - $k_n$  ( $n = 1, \dots, N$ ) references a point in time at which the pulsed neuron  $n$  has generated the last pulse within the time span  $[0, T]$ , and
  - $N$  references a plurality of pulsed neurons contained in the neural network.
- The first discrimination value  $I(T)$  in a preferred embodiment satisfies the
- 15 following rule:

$$I(T) = - \int p(\text{out}) \cdot \ln(p(\text{out})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} + \\ + \sum_{j=1}^S p_j \int p(\text{out} | s^{(j)}) \cdot \ln(p(\text{out} | s^{(j)})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)}$$

with

$$p(\text{out}) = \sum_{j=1}^S p_j p(\text{out} | s^{(j)}),$$

whereby

- $s^{(j)}$  references an input quantity that is applied to the neural network at a time  $j$ ,
- $p_j$  references a probability that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ ,
- 5 •  $p(\text{out}|s^{(j)})$  references a conditioned probability that a pulse is generated by a pulsed neuron in the neural network under the condition that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ .

According to the foregoing, the training sequence of inputs quantities is measured physical signals, in particular, the training sequence of input quantities is  
10 signals of an electroencephalogram.

The present invention provides a method for the classification of a sequence of input quantities upon employment of a neural network that contains pulsed neurons and was trained according to the following steps:

- a) the neural network is trained such for a first time span that a discrimination  
15 value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- 20 c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed  
25 by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value,

-- whereby the sequence of input quantities is supplied to the neural network;

- whereby a classification signal is formed that indicates what kind of sequence of input quantities the supplied sequence is.

In the preferred embodiment, the training sequence of input quantities and the sequence of input quantities are measured physical signals, for example, measured signals of an electroencephalogram.

The present invention also provides a neural network that contains pulsed neurons has been trained according to the following steps:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

The neural network is utilized for the classification of a physical signal, such as classification of a signals of an electroencephalogram.

An arrangement for training a neural network that contains pulsed neurons comprises a processor that is configured such that the following steps can be implemented:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

The arrangement may be utilized for the classification of a physical signal, such as for the classification of a signal of an electroencephalogram.

A method for training a neural network that contains pulsed neurons comprises the following steps:

- a) the neural network is trained for a first time span such that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,

-- when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,  
 -- otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

A method for the classification of a sequence of input quantities upon employment of a neural network that contains pulsed neurons and was trained according to the following steps comprises the following steps:

- 10 a) the neural network is trained for a first time span such that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- 15 c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value,
  - 20 -- the sequence of input quantities is supplied to the neural network;
- d) a classification signal is formed that indicates what kind of sequence of input quantities the supplied sequence is.

A neural network that contains pulsed neurons has been trained according to the following steps:

- a) the neural network is trained for a first time span such that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

An arrangement for training a neural network that contains pulsed neurons comprises a processor that is configured such that the following steps can be implemented:

- a) the neural network is trained for a first time span such that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,

-- when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,

-- otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

The invention makes it possible to classify a time sequence of input quantities with a neural network what contains pulsed neurons, whereby it is assured that, given optimized classification dependability, a minimized plurality of time values must be supplied to the neural network for classification.

Preferred developments of the invention INSERT DEPENDENT CLAIMS.

An optimization method that is not gradient based is preferably employed for the maximization of the first discrimination value and/or the second discrimination value, preferably an optimization method based on the ALOPEX method.

The first discrimination value preferably satisfies the following rule:

$$I(T) = I \left[ s; \left\{ \begin{matrix} t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \\ t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \end{matrix} \right\} \right], \quad (7)$$

whereby

- s references the input quantities,
- $t_m^{(n)}$  references a pulse that is generated by a pulsed neuron n at a time m within a time span [0, T],
- $k_n$  ( $n = 1, \dots, N$ ) references a point in time at which the pulsed neuron n has generated the last pulse within the time span [0, T],
- N references a plurality of pulsed neurons contained in the neural network.

In a further development, the first discrimination value satisfies the following rule:

$$\begin{aligned}
I(T) = & -\int p(\text{out}) \cdot \ln(p(\text{out})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} + \\
& + \sum_{j=1}^S p_j \int p(\text{out}|s^{(j)}) \cdot \ln(p(\text{out}|s^{(j)})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} \quad (8)
\end{aligned}$$

with

$$p(\text{out}) = \sum_{j=1}^S p_j p(\text{out}|s^{(j)}), \quad (9)$$

whereby

- $s^{(j)}$  references an input quantity that is applied to the neural network at a time  $j$ ,
- $p_j$  references a probability that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ ,
- $p(\text{out}|s^{(j)})$  references a conditioned probability that a pulse is generated by a pulsed neuron in the neural network under the condition that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ .

The training sequences of input quantities are preferably measured physical signals.

The methods and the arrangements can thus be utilized in the framework of the description of a technical system, particularly for describing or, respectively, investigating a multi-channel signal that has been registered by an electroencephalograph and describes an electroencephalogram.

The methods and the arrangements can also be utilized for the analysis of multi-variant financial data in a financial market for the analysis of economic relationships.

The described method steps can be realized both in software for the processor as well as in hardware, i.e. with a specific circuit.

### **BRIEF DESCRIPTION OF DRAWINGS**

An exemplary embodiment of the invention is shown in the Figures and is explained in greater detail below.

- Figure 1 is a flowchart wherein the individual method steps of the exemplary embodiment are presented;
- Figure 2 is a functional block diagram showing an electroencephalograph and a patient for whom a electroencephalogram is produced;
- Figure 3 is a schematic diagram of a neural network according to the exemplary embodiment;
- Figure 4 is a schematic diagram on the basis whereof the principle underlying the exemplary embodiment is shown.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

- Figure 2** shows a patient 200 to whose head 201 sensors 202, 203, 204, 205 and 206 are attached for the registration of brain currents. Electrical signals 207, 208, 209, 210 and 211 picked up by the sensors 202, 203, 204, 205, 206 are supplied to an electroencephalograph 220 via a first input/output interface 221. The electroencephalograph 220 comprises a plurality of input channels. Via the input/output interface 221, which is connected to an analog-to-digital converter 222, the electrical signals are supplied to the electroencephalograph 220 and digitalized in the analog-to-digital converter 222, and each registered electrical signal is stored in a memory 223 as a sequence of time row values.

- A sequence of time row values is thus characterized by a sampling interval as well as by a time duration, referred to below as a time span, during which a respective electrical signal is registered. The memory 223 is connected to the analog-to-digital converter 222 as well as to a processor 224 and a second input-output interface 225 via a bus 226.

A picture screen 228 (via a first cable 227), a keyboard 230 (via a second cable 229) and a computer mouse 232 (via a third cable) are also connected to the second input/output interface 225.

Results of the examination of the patient 200 are shown on the picture screen 228. A user (not shown) can make inputs into the system via the keyboard 230 or, respectively, the computer mouse 232.

The processor 224 is configured such that the method steps described later can be implemented.

A respective sequence of time row values as well as particular information about the class of time row values to which the sequence of time row values is to be allocated form a training datum.

A plurality of training data form a training data set with which a neural network 301 described later is trained.

**Figure 3** shows the neural network 301 with pulsed neurons.

A sequence 306, 307 and 308 of time row values is respectively applied to a respective input neuron 302, 303 and 304 of an input layer 305. A particular information as to whether the sequence 306, 307 and 308 of the time row values, broadly referred to as input pattern 306, 307 and 308, is a matter of an input pattern 306, 307 and 308 of a first class or a matter of an input pattern 306, 307 and 308 of a second class is allocated to each applied sequence 306, 307 and 308 of time row values in the framework of the training method.

A respective input neuron 302, 303 and 304 is respectively connected to an intermediate neuron 309, 310 and 311 of an intermediate layer 312 via a weighted connection 313, 314 and 315.

The intermediate neurons 309, 310 and 311 are connected to one another via connections 316, 317, 318, 319, 320 and 321 that are likewise weighted.

The intermediate neurons 309, 310 and 311 are also connected to further pulsed neurons 322, 323 and 324 via weighted connections 325, 326, 327, 328, 329 and 330.

The pulsed neurons respectively comprise the above-described behavior that is presented in the publication by Gerstner, "Time Structure of the Activity in Neural Network Models".

The intermediate neurons 309, 310 and 311 are connected to a plurality of the intermediate neurons 309, 310 and 311; the respective, further pulsed neurons 322, 323 and 324 are respectively connected to exactly one intermediate neuron 309, 310, 311. In this way, it is possible to model a far-reaching influencing between neurons of a neural network as well as a local influencing of neurons within the neural network.

An output neuron 331 is connected to the further pulsed neurons 322, 323 and 324 via weighted connections 332, 333 and 334. The output neuron 331 forms an output signal 335 that indicates the class to which the input pattern 306, 307 and 308 belongs.

In the training phase of the neural network 301, the output quantity 335 is compared to the classification particular information allocated to the respective input pattern, and an error signal E is formed that is employed for adapting the weightings of the connections between the neurons present in the neural network 301.

The method according to the ALOPEX method, which is not gradient based, is utilized as the training method in the framework of this exemplary embodiment. The goal of the ALOPEX method is the minimization of an error criterion E taking into consideration and adapting the weightings  $w_{bc}$  for a training dataset.

The ALOPEX is explained in greater detail below.

A neuron b is connected to a neuron c via a connection that is weighted with the weighting  $w_{bc}$ . During an  $f^{\text{th}}$  iteration, the weighting  $w_{bc}$  is updated according to the following rule:

$$w_{bc}(f) = w_{bc}(f - 1) + \delta_{bc}(f), \quad (10)$$

whereby  $\delta_{bc}(f)$  references a small positive or negative, predetermined step width  $\delta$  according to the following rule:

$$\delta_{bc}(f) = \begin{cases} -\delta & \text{with a probability } p_{bc}(f) \\ +\delta & \text{with a probability } 1 - p_{bc}(f) \end{cases} \quad (11)$$

A probability  $p_{bc}(f)$  is formed according to the following rule:

$$p_{bc}(f) = \frac{1}{1 + e^{-\frac{C_{bc}(f)}{T(f)}}} \quad (12)$$

whereby  $C_{bc}(f)$  is formed according to the following rule:

$$C_{bc}(f) = \Delta w_{bc}(f) \cdot \Delta E(f) \quad (13)$$

$T(f)$  references a prescribable value.  $\Delta w_{bc}(f)$  and  $\Delta E(f)$  reference the weighting changes  $\Delta w_{bc}(f)$  of the weightings  $w_{bc}$  or, respectively, the change  $\Delta E(f)$  of the error criterion during the preceding two iterations according to the rules:

$$\Delta w_{bc}(f) = w_{bc}(f-1) + w_{bc}(f-2), \quad (14)$$

$$\Delta E_{bc}(f) = E_{bc}(f-1) + E_{bc}(f-2). \quad (15)$$

The predetermined value  $T(f)$  is updated every  $F$  iterations according to the following rule:

$$T(f) = \frac{1}{FM} \sum_b \sum_c \sum_{f'=f-F}^{f-1} |C_{bc}(f')| \quad (16)$$

when  $f$  is a whole multiple of  $F$ , and

$$T(f) = T(f-1) \quad \text{otherwise,} \quad (17)$$

whereby  $M$  references a plurality of connections in the neural network 301.

Equation (16) can be simplified to form the following rule:

$$T(\mathbf{f}) = \frac{\delta}{F} \sum_{\mathbf{f}' = \mathbf{f} - F}^{\mathbf{f} - 1} |\Delta E(\mathbf{f}')|. \quad (18)$$

The neural network 301 is trained according to the above-described training method upon employment of the training dataset.

Further, a first discrimination value  $I(T)$  for the neural network 301 is formed according to the following rule:

$$I(T) = I \left[ s; \left\{ \begin{array}{l} t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \\ t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \end{array} \right\} \right], \quad (19)$$

5 whereby

- $s$  references the input quantities,
- $t_m^{(n)}$  references a pulse that is generated by a pulsed neuron  $n$  at a time  $m$  within a time span  $[0, T]$ ,
- $k_n$  ( $n = 1, \dots, N$ ) references a point in time at which the pulsed neuron  $n$  has generated the last pulse within the time span  $[0, T]$ ,
- $N$  references a plurality of pulsed neurons contained in the neural network.

10

The first discrimination value  $I(T)$  clearly corresponds to the difference of the following entropies:

$$I(T) = H(\text{out}) - \langle H(\text{out}|s) \rangle_s, \quad (20)$$

with

$$H(\text{out}) = - \int p(\text{out}) \cdot \ln(p(\text{out})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} \quad (21)$$

and

$$\langle H(\text{out}|s) \rangle_s = - \sum_{j=1}^S p_j \int p(\text{out}|s^{(j)}) \cdot \ln(p(\text{out}|s^{(j)})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)}. \quad (22)$$

The first discrimination value  $I(T)$  thus derives according to the following rule:

whereby

- $s^{(j)}$  references an input quantity that is applied to the neural network at a time  $j$ ,
- $p_j$  references a probability that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ ,
- $p(\text{out}|s^{(j)})$  references a conditioned probability that a pulse is generated by a pulsed neuron in the neural network under the condition that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ .

When a maximum first discrimination value  $I(T)$  has been determined in the framework of training the neural network 301, then this means that the input pattern 306, 307, 308 observed in the first time span contains enough information in order to classify the input pattern with adequate dependability.

The first discrimination value  $I(T)$  is clearly formed (step 101) in the framework of the training for a first time span  $[0; T]$  (see **Figure 1**).

In a further step (step 102), a second time span is formed by shortening the first time span:  $[0; T']$ , whereby  $T' < T$  applies.

For the second time span  $[0; T']$ , a second discrimination value  $I(T')$  is formed in a further step (step 103) in the same way as described above for the first discrimination value  $I(T)$ .

The first discrimination value  $I(T)$  is compared to the second discrimination value  $I(T')$  (step 104).

When the second discrimination value  $I(T')$  is the same as the first discrimination value  $I(T)$ , then a new second time span is formed (step 105) by shortening the second time span  $[0; T']$ , and the new second time span is considered to be the second time span (step 106). A second discrimination value  $I(T')$  is in turn formed (step 103) for the second time span of the new iteration.

Clearly, this iterative method means that the time span wherein pulses generated by the pulsed neurons are taken into consideration for forming the output signal is shortened until the second discrimination value  $I(T')$  is unequal to the first discrimination value  $I(T)$ .

When the second discrimination value  $I(T')$  is smaller than the first discrimination value, then the neural network 301 is viewed as being an optimized neural network that was trained in the last preceding iteration wherein the second discrimination value  $I(T')$  was not smaller than the first discrimination value  $I(T)$  (step 107).

The time span respectively taken into consideration is divided into discrete time sub-spans for which the only thing respectively determined is whether a neuron generated a pulse during the time sub-span or not.

In this way, the calculating outlay needed for the training is considerably reduced.

For further illustration, the principle is explained again on the basis of **Figure 4**.

**Figure 4** shows two continuous processes p1 and p2 that are formed by a set of continuous input signals S1 and S2. Two sequences of input quantities, the input patterns, are present after a corresponding, above-described digitalization. The input patterns are supplied to the trained neural network 401 in an application phase, and a  
5 space-time encoding of the processes p1 and p2 is clearly implemented on the basis of the time rows for the trained neural network 401.

On the basis of an output signal 402, the trained neural network 401 indicates the kind of process the input pattern involves. The trained neural network 401 exhibits the property that, first, the dependability of the optimization is optimized and,  
10 second, a minimum plurality of time row values, i.e. a minimum second time span 403, is required in order to dependably implement the classification.

A few alternatives to the above-described exemplary embodiment are present below:

The plurality of inputs, of pulsed neurons as well as output signals is generally  
15 arbitrary. The plurality of different sequences of time row values is also arbitrary in the framework of the classification and in the framework of the training. An electroencephalogram analysis is thus possible for an arbitrary plurality of channels for characterizing tumors.

Although other modifications and changes may be suggested by those skilled  
20 in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.

### **Abstract of the Disclosure**

For a first time span, the neural network is trained such that a discrimination value is maximized, whereby the discrimination values is dependent on pulses that are formed by pulsed neurons within the first time span. Iteratively, the first time span is shortened and a second discrimination value is formed until the second discrimination value is smaller than the maximum discrimination value. The trained neural network is the neural network of the last iteration wherein the second discrimination value is equal to the maximum discrimination value.

11/11/2019 10:10:10 AM

**METHOD FOR TRAINING A NEURAL NETWORK, METHOD FOR THE  
CLASSIFICATION OF A SEQUENCE OF INPUT QUANTITIES UPON  
EMPLOYMENT OF A NEURAL NETWORK, NEURAL NETWORK AND  
ARRANGEMENT FOR THE TRAINING OF A NEURAL NETWORK**

5           The invention is directed to a method for training a neural network, to a method for the classification of a sequence of input quantities upon employment of a neural network as well as to a neural network and an arrangement for training a neural network.

10           A neural network comprises neurons that are at least partially connected to one another. Input neurons of the neural network are supplied with input signals as input quantities supplied to the input neurons. The neural network usually comprises a plurality of layers. A respective neuron generates a signal dependent on input quantities supplied to a neuron of the neural network and on an activation function provided for the neuron, said signal being in turn supplied to neurons of a further  
15   layer as input quantity according to a prescribable weighting. An output quantity dependent on quantities that are supplied to the output neuron of neurons of the preceding layer is generated in an output neuron in an output layer. There are currently essentially two approaches in view of the questions as to the form in which information is stored in a neural network.

20           A first approach assumes that the information in a neural network is encoded in the spectral domain. Given this approach, a chronological sequence of input quantities is encoded such that a respective input neuron is provided for each time row value of a chronological sequence of the input quantities, the respective time row value being applied to this input neuron.

25           Given a neural network that is designed according to this approach, a hyperbolic tangent (tanh) is usually employed as activation function.

          This first type of neural network is referred to below as static neural network.

What is particularly disadvantageous about this approach is that it is not possible with a static neural network to explicitly consider a dynamics of a process subject to a technical system in the internal coding of the sequence of input quantities.

The Time Delay Neural Networks (TDNN) known from [4] attempt to  
 5 counter this disadvantage in that, given a plurality of sequences of input quantities, a respective input neuron is provided for each sequence and for each time row value. This approach particularly exhibits the disadvantage that the dimension of the input space -- represented by the plurality of input neurons -- increases exponentially with an increasing plurality of different sequences of input quantities to be taken into  
 10 consideration.

An increasing plurality of neurons in the neural network, moreover, involves an increased training outlay upon employment of a plurality of training data that increases with an increasing plurality of neurons. A training of a static neural network becomes highly calculation-intensive under these conditions or, respectively,  
 15 can practically no longer be implemented.

A gradient-based training method, for example the back-propagation method, is usually utilized for training a static neural network.

[3] also discloses a training method for a static neural network that is referred to as the ALOPEX method. In this method, the training of a static neural  
 20 network is viewed as an optimization problem. In this case, the goal of the optimization is a minimization of a error criterion E taking weightings that are present in the static neural network and with which the connections between neurons are weighted into consideration for a predetermined training data set with training data.

A training datum is a tuple that [...] input quantities, for example state  
 25 quantities of a technical system or, respectively, boundary conditions that a technical system is subject to and that are supplied to a technical system as well as an output quantity determined under the boundary conditions and that the technical system forms for the input quantities.

The ALOPEX method shall be explained in greater detail later in  
 30 conjunction with the exemplary embodiment.

A second approach can be seen therein that the information about a system is encoded in the time domain and in the spectral domain. An artificial neural network that does justice to this approach comprises what are referred to as pulsed neurons and is known from [2].

- 5 According to [1], a pulsed neuron is modelled such that the behavior of a pulsed neuron with respect to an external stimulation, which is referred to below as input quantity, is described by a stochastic differential equation of the Itô type according to the following rule:

$$dV(t) = \left( -\frac{V(t)}{\tau} + \mu \right) dt + \sigma dW(t) + w dS(t). \quad (1)$$

- 10 In the rule (1),  $dW(t)$  references a standard Wiener process. A predetermined constant  $\tau$  describes a delay of a membrane potential  $V(t)$  of the modelled neuron without input quantity that is adjacent at the neuron. The model simulates the behavior of a biological neuron. For this reason, a pulsed neuron is also referred to as biologically oriented neuron.

- 15 Further,  $S(t)$  references a coupling of the neuron with another neuron, i.e. the following applies:

$$s(t) = \frac{d}{dt} S(t) = \sum_i \delta(t - t_i), \quad (2)$$

whereby  $t_i$  references an arrival time at which an external impulse arrives at an input of a neuron. A soma-synaptic intensity is modelled by a synaptic quantity  $w$ .

- 20 In this model, the pulsed neuron generates a pulse when the membrane potential  $V(t)$  reaches a predetermined threshold  $\Theta$ . After the pulse is generated, the membrane potential  $V(t)$  of the neuron is reset to a predetermined initialization potential value  $V(0)$ .

A time sequence of pulses is thus described according to the following rule:

$$t'_0, \dots, t'_k, \dots, \quad (3)$$

and satisfies the following rule:

$$o(t) = \sum_k \delta(t - t_k'). \quad (4)$$

It is also known from [1] that, given the assumption of the above-described model for a pulsed neuron, a discrimination value  $I(T)$  can be formed that indicates the dependability with which a sequence of input quantities is correctly classified in view of the training data employed for a training of the neural network.

The discrimination value  $I(T)$  is dependent on pulses that are formed by the pulsed neurons within a time span  $[0; T]$  as well as on a training sequence of input quantities that are supplied to the neural network. The discrimination value  $I(T)$  satisfies the following rule:

$$I(T) = I \left[ s; \left\{ t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \right. \right. \\ \left. \left. t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \right\} \right], \quad (5)$$

whereby

- $s$  references the input quantities,
- $t_m^{(n)}$  references a pulse that is generated by a pulsed neuron  $n$  at a time  $m$  within a time span  $[0, T]$ ,
- $k_n$  ( $n = 1, \dots, N$ ) references a point in time at which the pulsed neuron  $n$  has generated the last pulse within the time span  $[0, T]$ ,
- $N$  references a plurality of pulsed neurons contained in the neural network.

A stochastic differential equation of the Itô type derives for a neural network with a plurality of  $N$  neurons described according to the following rule:

$$dV_i(t) = \left( -\frac{V_i(t)}{\tau} + \mu \right) dt + \sigma dW_i(t) + \\ + \sum_{j=1}^N w_{ij} \sum_k \delta(t - t_{k-\Delta_{ij}}^{(j)}) dt + I_i(t) dt, \quad (6)$$

whereby

- $V_i(t)$  references a membrane potential of the  $i^{\text{th}}$  neuron ( $i = 1, \dots, N$ ),
- $N$  references a plurality of neurons contained in the neural network,
- $w_{ij}$  respectively references a weighting of a coupling between the  $i^{\text{th}}$  and the  $j^{\text{th}}$  neuron, clearly a synaptic intensity between the neurons  $i$  and  $j$ ,
- $\Delta_{ij}$  references a prescribable axonal delay of a signal between the neurons  $i$  and  $j$ ,
- $I_i(t)$  references an external stimulation signal of the neuron  $i$ .

[4] discloses a training method for a neural network. Given this method, the neural network is linked such in a control circuit with the model of a technical system that the neural network outputs at least one manipulated variable to the model as output quantity, and the model generates at least one regulating variable from the manipulated quantity supplied by the neural network, said at least one regulating variable being supplied to the neural network as input quantity. The regulating variable is superimposed with a noise having a known noise distribution before it is supplied to the model. As a reaction to the regulating variable modified by the impressed noise, the weightings of the neural network are set as follows: A cost function evaluates whether the change in weighting at the network has effected an improvement of the regulating variable with respect to a rated behavior of the model, and such weightings are favored by the cost function.

The invention is based on the problem of specifying a method as well as an arrangement for training a neural network having pulsed neurons. The invention is also based on the problem of specifying a method for the classification of a sequence of input quantities upon employment of a neural network having pulsed neurons as well as specifying a neural network having pulsed neurons.

The problems are solved by the methods and the arrangement as well as by the neural network having the features of the independent patent claims.

A method for training a neural network that contains pulsed neurons comprises the following steps:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

A method for the classification of a sequence of input quantities upon employment of a neural network that contains pulsed neurons and was trained according to the following steps comprises the following steps:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time

span that is formed by shortening the second time span of the preceding iteration,

-- otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value,

-- the sequence of input quantities is supplied to the neural network;

d) a classification signal is formed that indicates what kind of sequence of input quantities the supplied sequence is.

A neural network that contains pulsed neurons has been trained according

to the following steps:

a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;

b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;

c) the following steps are interactively implemented:

-- the first time span is shortened to form a second time span,

-- a second discrimination value is formed for the second time span,

-- when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,

-- otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

An arrangement for training a neural network that contains pulsed neurons comprises a processor that is configured such that the following steps can be implemented:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
- the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

The invention makes it possible to classify a time sequence of input quantities with a neural network what contains pulsed neurons, whereby it is assured that, given optimized classification dependability, a minimized plurality of time values must be supplied to the neural network for classification.

Preferred developments of the invention derive from the dependent claims.

An optimization method that is not gradient based is preferably employed for the maximization of the first discrimination value and/or the second discrimination value, preferably an optimization method based on the ALOPEX method.

The first discrimination value preferably satisfies the following rule:

$$I(T) = I \left( s, \left\{ \begin{matrix} t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \\ t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \end{matrix} \right\} \right), \quad (7)$$

whereby

- s references the input quantities,

- $t_m^{(n)}$  references a pulse that is generated by a pulsed neuron  $n$  at a time  $m$  within a time span  $[0, T]$ ,
  - $k_n$  ( $n = 1, \dots, N$ ) references a point in time at which the pulsed neuron  $n$  has generated the last pulse within the time span  $[0, T]$ ,
  - 5 •  $N$  references a plurality of pulsed neurons contained in the neural network.
- In a further development, the first discrimination value satisfies the

following rule:

$$I(T) = -\int p(\text{out}) \cdot \ln(p(\text{out})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} + \\ + \sum_{j=1}^S p_j \int p(\text{out}|s^{(j)}) \cdot \ln(p(\text{out}|s^{(j)})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} \quad (8)$$

with

$$p(\text{out}) = \sum_{j=1}^S p_j p(\text{out}|s^{(j)}), \quad (9)$$

whereby

- $s^{(j)}$  references an input quantity that is applied to the neural network at a time  $j$ ,
- 10 •  $p_j$  references a probability that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ ,
- $p(\text{out}|s^{(j)})$  references a conditioned probability that a pulse is generated by a pulsed neuron in the neural network under the condition that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ .
- 15

The training sequences of input quantities are preferably measured physical signals.

The methods and the arrangements can thus be utilized in the framework of the description of a technical system, particularly for describing or, respectively,

20 investigating a multi-channel signal that has been registered by an electroencephalograph and describes an electroencephalogram.

The methods and the arrangements can also be utilized for the analysis of multi-variant financial data in a financial market for the analysis of economic relationships.

5 The described method steps can be realized both in software for the processor as well as in hardware, i.e. with a specific circuit.

An exemplary embodiment of the invention is shown in the Figures and is explained in greater detail below.

Shown are:

- 10 Figure 1 a flowchart wherein the individual method steps of the exemplary embodiment are presented;
- Figure 2 a sketch of an electroencephalograph and a patient for whom a electroencephalogram is produced;
- Figure 3 a sketch of a neural network according to the exemplary embodiment;
- 15 Figure 4 a sketch on the basis whereof the principle underlying the exemplary embodiment is shown.

**Figure 2** shows a patient 200 to whose head 201 sensors 202, 203, 204, 205 and 206 are attached for the registration of brain stomata [sic; should probably read "currents"]. Electrical signals 207, 208, 209, 210 and 211 picked up by the sensors 202, 203, 204, 205, 206 are supplied to an electroencephalograph 220 via a  
 20 first input/output interface 221. The electroencephalograph 220 comprises a plurality of input channels. Via the input/output interface 221, which is connected to an analog-to-digital converter 222, the electrical signals are supplied to the electroencephalograph 220 and digitalized in the analog-to-digital converter 222, and each registered electrical signal is stored in a memory 223 as a sequence or time row  
 25 values.

A sequence of time row values is thus characterized by a sampling interval as well as by a time duration, referred to below as time span, during which a respective electrical signal is registered. The memory 223 is connected to the analog-to-digital converter 222 as well as to a processor 224 and a second input-output  
 30 interface 225 via a bus 226.

A picture screen 228 (via a first cable 227), a keyboard 230 (via a second cable 229) and a computer mouse 232 (via a third cable) are also connected to the second input/output interface 225.

Results of the examination of the patient 200 are shown on the picture screen 228. A user (not shown) can make inputs into the system via the keyboard 230 or, respectively, the computer mouse 232.

The processor 224 is configured such that the method steps described later can be implemented.

A respective sequence of time row values as well as a particular about the class of time row values to which the sequence of time row values is to be allocated form a training datum.

A plurality of training data form a training data set with which a neural network 301 described later is trained.

**Figure 3** shows the neural network 301 with pulsed neurons.

A sequence 306, 307, 308 of time row values is respectively applied to a respective input neuron 302, 303, 304 of an input layer 305. A particular as to whether the sequence 306, 307, 308 of the time row values, broadly referred to as input pattern 306, 307, 308, is a matter of an input pattern 306, 307, 308 of a first class or a matter of an input pattern 306, 307, 308 of a second class is allocated to each applied sequence 306, 307, 308 of time row values in the framework of the training method.

A respective input neuron 302, 303, 304 is respectively connected to an intermediate neuron 309, 310, 311 of an intermediate layer 312 via a weighted connection 313, 314, 315.

The intermediate neurons 309, 310, 311 are connected to one another via connections 316, 317, 318, 319, 320, 321 that are likewise weighted.

The intermediate neurons 309, 310, 311 are also connected to further pulsed neurons 322, 323, 324 via weighted connections 325, 326, 327, 328, 329 and 330.

The pulsed neurons respectively comprise the above-described behavior that is presented in [2].

The intermediate neurons 309, 310, 311 are connected to a plurality of intermediate neurons 309, 310, 311; the respective, further pulsed neurons 322, 323, 324 are respectively connected to exactly one intermediate neuron 309, 310, 311. In this way, it is possible to model a far-reaching influencing between neurons of a neural network as well as a local influencing of neurons within the neural network.

An output neuron 331 is connected to the further pulsed neurons 322, 323, 324 via weighted connections 332, 333 and 334. The output neuron 331 forms an output signal 335 that indicates the class to which the input pattern 306, 307, 308 belongs.

In the training phase of the neural network 301, the output quantity 335 is compared to the classification particular allocated to the respective input pattern, and an error signal E is formed that is employed for adapting the weightings of the connections between the neurons present in the neural network 301.

The method according to the ALOPEX method, which is not gradient based, is utilized as the training method in the framework of this exemplary embodiment. The goal of the ALOPEX method is the minimization of an error criterion E taking into consideration and adapting the weightings  $w_{bc}$  for a training dataset.

The ALOPEX is explained in greater detail below.

A neuron b is connected to a neuron c via a connection that is weighted with the weighting  $w_{bc}$ . During an  $f^{\text{th}}$  iteration, the weighting  $w_{bc}$  is updated according to the following rule:

$$w_{bc}(f) = w_{bc}(f - 1) + \delta_{bc}(f), \quad (10)$$

whereby  $\delta_{bc}(f)$  references a small positive or negative, predetermined step width  $\delta$  according to the following rule:

$$\delta_{bc}(f) = \begin{cases} -\delta & \text{with a probability } p_{bc}(f) \\ +\delta & \text{with a probability } 1 - p_{bc}(f) \end{cases}. \quad (11)$$

A probability  $p_{bc}(f)$  is formed according to the following rule:

$$p_{bc}(f) = \frac{1}{1 + e^{-\frac{C_{bc}(f)}{T(f)}}}, \quad (12)$$

whereby  $C_{bc}(f)$  is formed according to the following rule:

$$C_{bc}(f) = \Delta w_{bc}(f) \cdot \Delta E(f). \quad (13)$$

$T(f)$  references a prescribable value.  $\Delta w_{bc}(f)$  and  $\Delta E(f)$  reference the weighting changes  $\Delta w_{bc}(f)$  of the weightings  $w_{bc}$  or, respectively, the change  $\Delta E(f)$  of the error criterion during the preceding two iterations according to the rules:

$$\Delta w_{bc}(f) = w_{bc}(f-1) + w_{bc}(f-2), \quad (14)$$

$$\Delta E_{bc}(f) = E_{bc}(f-1) + E_{bc}(f-2). \quad (15)$$

The predetermined value  $T(f)$  is updated every  $F$  iterations according to the following rule:

$$T(f) = \frac{1}{FM} \sum_b \sum_c \sum_{f'=f-F}^{f-1} |C_{bc}(f')| \quad (16)$$

when  $f$  is a whole multiple of  $F$ , and

$$T(f) = T(f-1) \quad \text{otherwise}, \quad (17)$$

whereby  $M$  references a plurality of connections in the neural network 301.

Equation (16) can be simplified to form the following rule:

$$T(f) = \frac{\delta}{F} \sum_{f'=f-F}^{f-1} |\Delta E(f')|. \quad (18)$$

The neural network 301 is trained according to the above-described training method upon employment of the training dataset.

Further, a first discrimination value  $I(T)$  for the neural network 301 is formed according to the following rule:

$$I(T) = I_s \left[ \begin{matrix} t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \\ t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \end{matrix} \right], \quad (19)$$

whereby

- $s$  references the input quantities,
- $t_m^{(n)}$  references a pulse that is generated by a pulsed neuron  $n$  at a time  $m$  within a time span  $[0, T]$ ,
- $k_n$  ( $n = 1, \dots, N$ ) references a point in time at which the pulsed neuron  $n$  has generated the last pulse within the time span  $[0, T]$ ,
- $N$  references a plurality of pulsed neurons contained in the neural network.

The first discrimination value  $I(T)$  clearly corresponds to the difference of the following entropies:

$$I(T) = H(\text{out}) - \langle H(\text{out}|s) \rangle_s, \quad (20)$$

with

$$H(\text{out}) = - \int p(\text{out}) \cdot \ln(p(\text{out})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} \quad (21)$$

and

$$\langle H(\text{out}|s) \rangle_s = - \sum_{j=1}^s p_j \int p(\text{out}|s^{(j)}) \cdot \ln(p(\text{out}|s^{(j)})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)}. \quad (22)$$

The first discrimination value  $I(T)$  thus derives according to the following rule:

$$\begin{aligned}
I(T) = & -\int p(\text{out}) \cdot \ln(p(\text{out})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} + \\
& + \sum_{j=1}^s p_j \int p(\text{out}|s^{(j)}) \cdot \ln(p(\text{out}|s^{(j)})) dt_1^{(1)} \dots dt_{k_1}^{(1)} \dots dt_{k_N}^{(N)} \quad (23)
\end{aligned}$$

with

$$p(\text{out}) = \sum_{j=1}^s p_j p(\text{out}|s^{(j)}), \quad (24)$$

whereby

- $s^{(j)}$  references an input quantity that is applied to the neural network at a time  $j$ ,
- $p_j$  references a probability that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ ,
- $p(\text{out}|s^{(j)})$  references a conditioned probability that a pulse is generated by a pulsed neuron in the neural network under the condition that the input quantity  $s^{(j)}$  is applied to the neural network at a point in time  $j$ .

When a maximum first discrimination value  $I(T)$  has been determined in the framework of training the neural network 301, then this means that the input pattern 306, 307, 308 observed in the first time span contains enough information in order to classify the input pattern with adequate dependability.

The first discrimination value  $I(T)$  is clearly formed (step 101) in the framework of the training for a first time span  $[0; T]$  (see **Figure 1**).

In a further step (step 102), a second time span is formed by shortening the first time span:  $[0; T']$ , whereby  $T' < T$  applies.

For the second time span  $[0; T']$ , a second discrimination value  $I(T')$  is formed in a further step (step 103) in the same way as described above for the first discrimination value  $I(T)$ .

The first discrimination value  $I(T)$  is compared to the second discrimination value  $I(T')$  (step 104).

When the second discrimination value  $I(T')$  is the same as the first discrimination value  $I(T)$ , then a new second time span is formed (step 105) by shortening the second time span  $[0; T']$ , and the new second time span is considered to be the second time span (step 106). A second discrimination value  $I(T')$  is in turn  
 5 formed (step 103) for the second time span of the new iteration.

Clearly, this iterative method means that the time span wherein pulses generated by the pulsed neurons are taken into consideration for forming the output signal is shortened until the second discrimination value  $I(T')$  is unequal to the first discrimination value  $I(T)$ .

10 When the second discrimination value  $I(T')$  is smaller than the first discrimination value, then the neural network 301 is viewed as being an optimized neural network that was trained in the last preceding iteration wherein the second discrimination value  $I(T')$  was not smaller than the first discrimination value  $I(T)$  (step 107).

15 The time span respectively taken into consideration is divided into discrete time sub-spans for which the only thing respectively determined is whether a neuron generated a pulse during the time sub-span or not.

In this way, the calculating outlay needed for the training is considerably reduced.

20 For further illustration, the principle is explained again on the basis of **Figure 4.**

**Figure 4** shows two continuous processes  $p1$  and  $p2$  that are formed by a set of continuous input signals  $S1$  and  $S2$ . Two sequences of input quantities, the input patterns, are present after a corresponding, above-described digitalization. The  
 25 input patterns are supplied to the trained neural network 401 in an application phase, and a space-time encoding of the processes  $p1$ ,  $p2$  is clearly implemented on the basis of the time rows for the trained neural network 401.

On the basis of an output signal 402, the trained neural network 401 indicates the kind of process the input pattern involves. The trained neural network  
 30 401 exhibits the property that, first, the dependability of the optimization is optimized

and, second, a minimum plurality of time row values, i.e. a minimum second time span 403, is required in order to dependably implement the classification.

A few alternatives to the above-described exemplary embodiment are present below:

- 5           The plurality of inputs, of pulsed neurons as well as output signals is generally arbitrary. The plurality of different sequences of time row values is also arbitrary in the framework of the classification and in the framework of the training. An electroencephalogram analysis is thus possible for an arbitrary plurality of channels for characterizing tumors.

The following publications have been cited in this document:

- [1] G. Deco and B. Schürmann, Information Transmission and Temporal  
Code in Central Spiking Neurons, Physical Review Letters, Vol. 79, No.  
23, pp. 4697-4700, December 1997
- 5 [2] W. Gerstner, Time structure of the activity in neural network models,  
Physical Review E, Vol. 51, No. 1, pp. 738-758, January 1995
- [3] K. P. Unnikrishnan and K. P. Venugopal, Alopex: A Correlation-Based  
Learning Algorithm for Feedforward and Recurrent Neural Networks, pp.  
471-490, Neural Computation, Vol. 6, 1994
- 10 [4] DE 195 31 967 C2

### Patent Claims

1. Method for training a neural network that contains pulsed neurons,
  - a) the neural network is trained such for a first time span ( $[0; T]$ ) that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
  - b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
  - c) the following steps are interactively implemented:
    - the first time span is shortened to form a second time span,
    - a second discrimination value is formed for the second time span,
    - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
    - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.

2. Method according to claim 1, whereby an optimization method that is not gradient based is utilized for the maximization of the first discrimination value and/or of the second discrimination value.

3. Method according to claim 2, whereby the optimization method is based on the ALOPEX method.

4. Method according to one of the claims 1 through 3, whereby the first discrimination value  $I(T)$  satisfies the following rule:

$$I(T) = I \left( s; \left\{ \begin{array}{l} t_1^{(1)}, \dots, t_m^{(1)}, \dots, t_{k_1}^{(1)}, t_1^{(2)}, \dots, t_m^{(2)}, \dots, t_{k_2}^{(2)}, \dots, \\ t_1^{(n)}, \dots, t_m^{(n)}, \dots, t_{k_n}^{(n)}, \dots, t_1^{(N)}, \dots, t_m^{(N)}, \dots, t_{k_N}^{(N)} \end{array} \right\} \right),$$

whereby

- s references the input quantities,

- 5

$I(T)$  satisfies the following rule:

$$\begin{aligned} \mathbb{I}(\mathbf{T}) = & -\int \mathbf{p}(\text{out}) \cdot \ln(\mathbf{p}(\text{out})) d\mathbf{t}_1^{(1)} \dots d\mathbf{t}_{k_1}^{(1)} \dots d\mathbf{t}_{k_N}^{(N)} + \\ & + \sum_{j=1}^S p_j \int \mathbf{p}(\text{out}|\mathbf{s}^{(j)}) \cdot \ln(\mathbf{p}(\text{out}|\mathbf{s}^{(j)})) d\mathbf{t}_1^{(1)} \dots d\mathbf{t}_{k_1}^{(1)} \dots d\mathbf{t}_{k_N}^{(N)} \end{aligned}$$

with

$$p(\text{out}) = \sum_{j=1}^S p_j p(\text{out} | s^{(j)}),$$

whereby

- 10

15

6. Method according to one of the claims 1 through 5, whereby the training sequence of inputs quantities are [sic] measured physical signals.

7. Method according to claim 6, whereby the training sequence of input quantities are [sic] signals of an electroencephalogram.

8. Method for the classification of a sequence of input quantities upon employment of a neural network that contains pulsed neurons and was trained according to the following steps:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
  - the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value,
- whereby the sequence of input quantities is supplied to the neural network;
- whereby a classification signal is formed that indicates what kind of sequence of input quantities the supplied sequence is.

9. Method according to claim 9, whereby the training sequence of input quantities and the sequence of input quantities are measured physical signals.

10. Method according to claim 9, whereby the training sequence of input quantities and the sequence of input quantities are measured signals of an electroencephalogram.

11. Neural network that contains pulsed neurons has been trained according to the following steps:

- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
- the first time span is shortened to form a second time span,
  - a second discrimination value is formed for the second time span,
  - when the second discrimination value is the same as the first discrimination value, then a new iteration ensues with a new second time span that is formed by shortening the second time span of the preceding iteration,
  - otherwise, the method is ended and the trained neural network is the neural network of the last iteration wherein the second discrimination value is the same as the first discrimination value.
12. Neural network according to claim 10, utilized for the classification of a physical signal.
13. Neural network according to claim 10, utilized for the classification of a physical signal.
14. Arrangement for training a neural network that contains pulsed neurons comprises a processor that is configured such that the following steps can be implemented:
- a) the neural network is trained such for a first time span that a discrimination value is maximized, as a result whereof a maximum first discrimination value is formed;
- b) the discrimination value is formed dependent on pulses that are formed by the pulsed neurons within the first time span as well as on a training sequence of input quantities that are supplied to the neural network;
- c) the following steps are interactively implemented:
- the first time span is shortened to form a second time span,

-- a second discrimination value is formed for the second time span,  
-- when the second discrimination value is the same as the first  
discrimination value, then a new iteration ensues with a new second time  
span that is formed by shortening the second time span of the preceding  
iteration,  
-- otherwise, the method is ended and the trained neural network is the  
neural network of the last iteration wherein the second discrimination  
value is the same as the first discrimination value.

5

15. Arrangement according to claim 14, utilized for the classification of a  
physical signal.

10

16. Arrangement according to claim 14, utilized for the classification of a  
signal of an electroencephalogram.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
219

**Abstract**

METHOD FOR TRAINING A NEURAL NETWORK, METHOD FOR THE  
CLASSIFICATION OF A SEQUENCE OF INPUT QUANTITIES UPON  
EMPLOYMENT OF A NEURAL NETWORK, NEURAL NETWORK AND  
5 ARRANGEMENT FOR THE TRAINING OF A NEURAL NETWORK

For a first time span, the neural network is trained such that a  
discrimination value is maximized, whereby the discrimination values is dependent on  
pulses that are formed by pulsed neurons within the first time span. Iteratively, the  
first time span is shortened and a second discrimination value is formed until the  
10 second discrimination value is smaller than the maximum discrimination value. The  
trained neural network is the neural network of the last iteration wherein the second  
discrimination value is equal to the maximum discrimination value.

**PCT**  
 WELTORGANISATION FÜR GEISTIGES EIGENTUM  
 Internationales Büro  
 INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE  
 INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)



<b>(51) Internationale Patentklassifikation <sup>7</sup> :</b> <b>G06N 3/04</b>	<b>A3</b>	<b>(11) Internationale Veröffentlichungsnummer:</b> <b>WO 00/11601</b>  <b>(43) Internationales Veröffentlichungsdatum:</b> 2. März 2000 (02.03.00)
<b>(21) Internationales Aktenzeichen:</b> PCT/DE99/01949  <b>(22) Internationales Anmeldedatum:</b> 1. Juli 1999 (01.07.99)  <b>(30) Prioritätsdaten:</b> 198 38 654.0      25. August 1998 (25.08.98)      DE  <b>(71) Anmelder (für alle Bestimmungsstaaten ausser US):</b> SIEMENS AKTIENGESELLSCHAFT [DE/DE]; Wittelsbacherplatz 2, D-80333 München (DE).  <b>(72) Erfinder; und</b> <b>(75) Erfinder/Anmelder (nur für US):</b> DECO, Gustavo [IT/DE]; Hauptstrasse 76, D-85579 Neubiberg (DE). SCHÜRMANN, Bernd [DE/DE]; Münchner Strasse 35, D-85778 Haimhausen (DE).  <b>(74) Gemeinsamer Vertreter:</b> SIEMENS AKTIENGESELLSCHAFT; Postfach 22 16 34, D-80506 München (DE).	<b>(81) Bestimmungsstaaten:</b> US, europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Veröffentlicht</b> <i>Mit internationalem Recherchenbericht.</i>  <b>(88) Veröffentlichungsdatum des internationalen Recherchenberichts:</b> 18. Mai 2000 (18.05.00)	

**(54) Title:** METHOD FOR TRAINING A NEURAL NETWORK, METHOD FOR CLASSIFYING A SEQUENCE OF INPUT PARAMETERS USING A NEURAL NETWORK, NEURAL NETWORK AND ARRAY FOR TRAINING A NEURAL NETWORK

**(54) Bezeichnung:** VERFAHREN ZUM TRAINIEREN EINES NEURONALEN NETZES, VERFAHREN ZUR KLASSIFIKATION EINER FOLGE VON EINGANGSGRÖSSEN UNTER VERWENDUNG EINES NEURONALEN NETZES, NEURONALES NETZ UND ANORDNUNG ZUM TRAINIEREN EINES NEURONALEN NETZES

**(57) Abstract**

The neural network is trained for a first period in such a way that a discrimination value is maximized, wherein the discrimination value is dependent on impulses formed by the pulsed neurons during the first period. The first period is shortened in an iterative manner and a second discrimination value is formed for the second period until the second discrimination value is smaller than the maximum discrimination value. The trained neural network is the neural network of the last iteration in which the second discrimination value equals the maximum discrimination value.

**(57) Zusammenfassung**

Für einen ersten Zeitraum wird das neuronale Netz derart trainiert, daß ein Unterscheidungswert maximiert wird, wobei der Unterscheidungswert abhängig ist von Impulsen, die von den gepulsten Neuronen innerhalb des ersten Zeitraums gebildet werden. Iterativ wird der erste Zeitraum so lange verkürzt und für den zweiten Zeitraum ein zweiter Unterscheidungswert gebildet, bis der zweite Unterscheidungswert kleiner ist als der maximale Unterscheidungswert. Das trainierte neuronale Netz ist das neuronale Netz der letzten Iteration, bei der der zweite Unterscheidungswert gleich dem maximalen Unterscheidungswert ist.

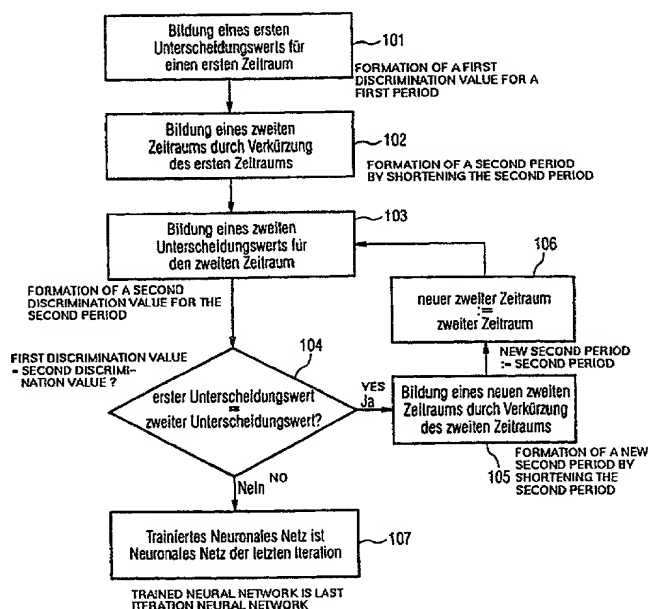


FIG 1

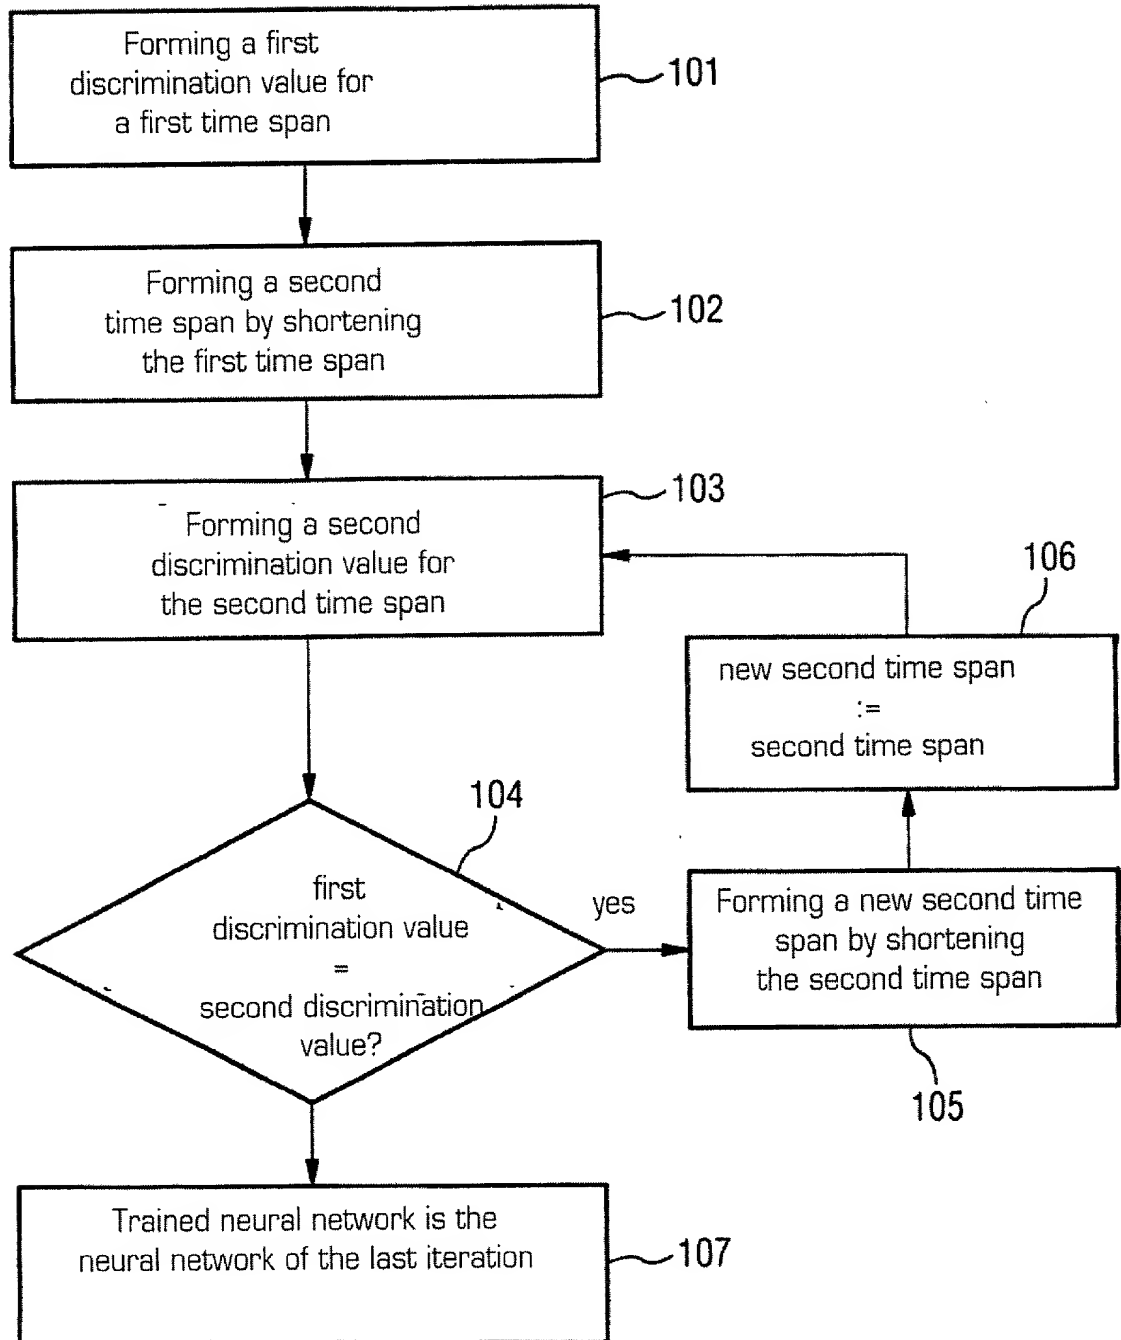


FIG 2



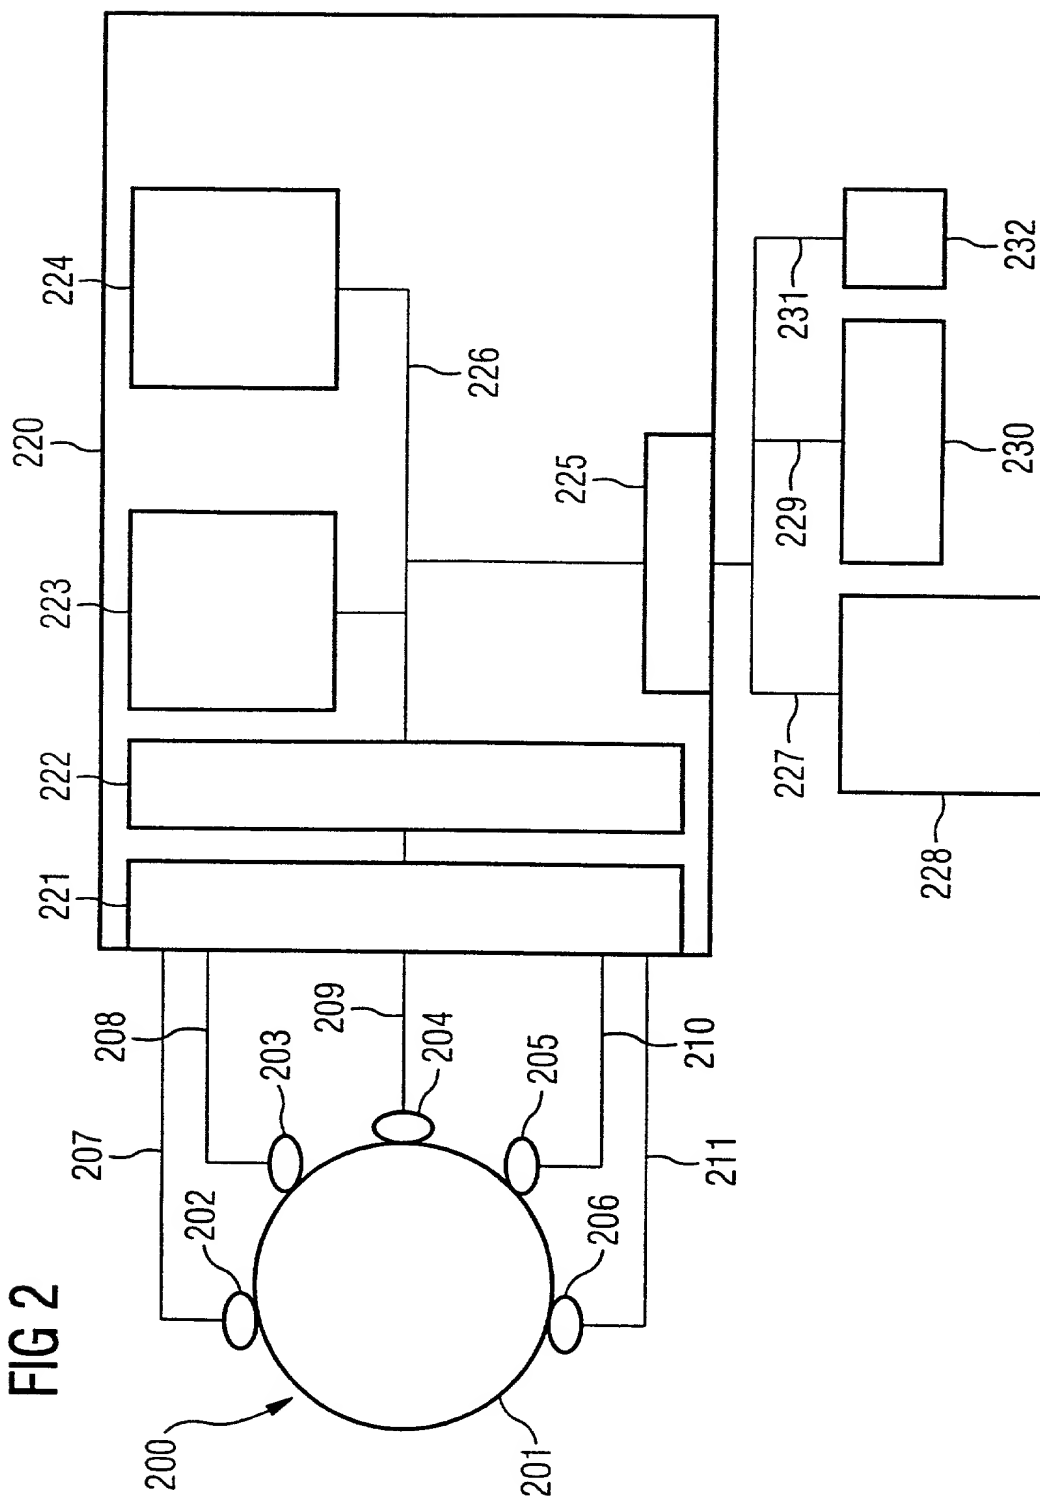


FIG 3

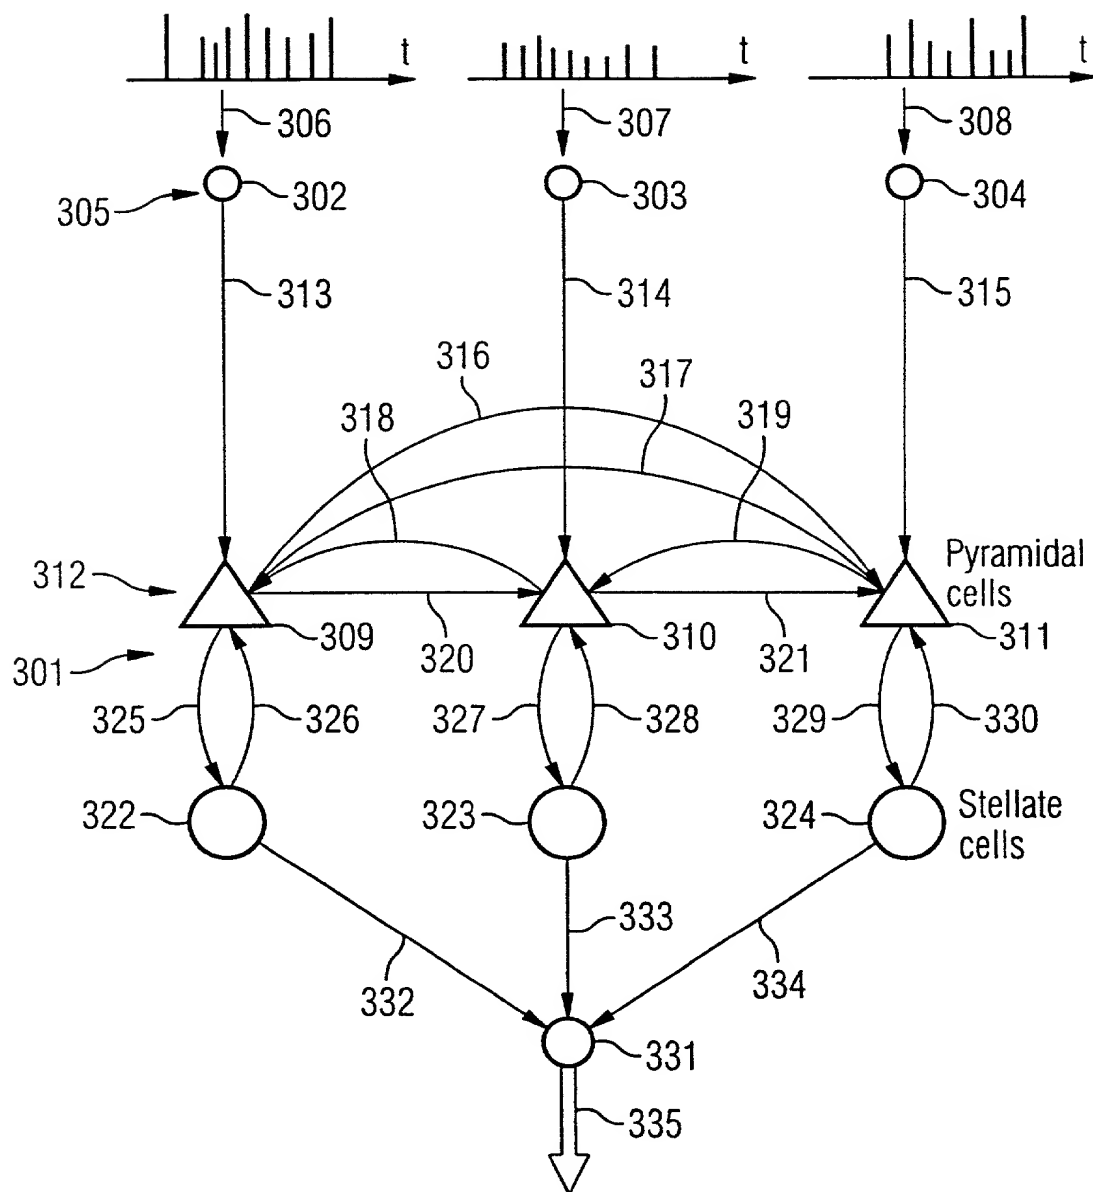

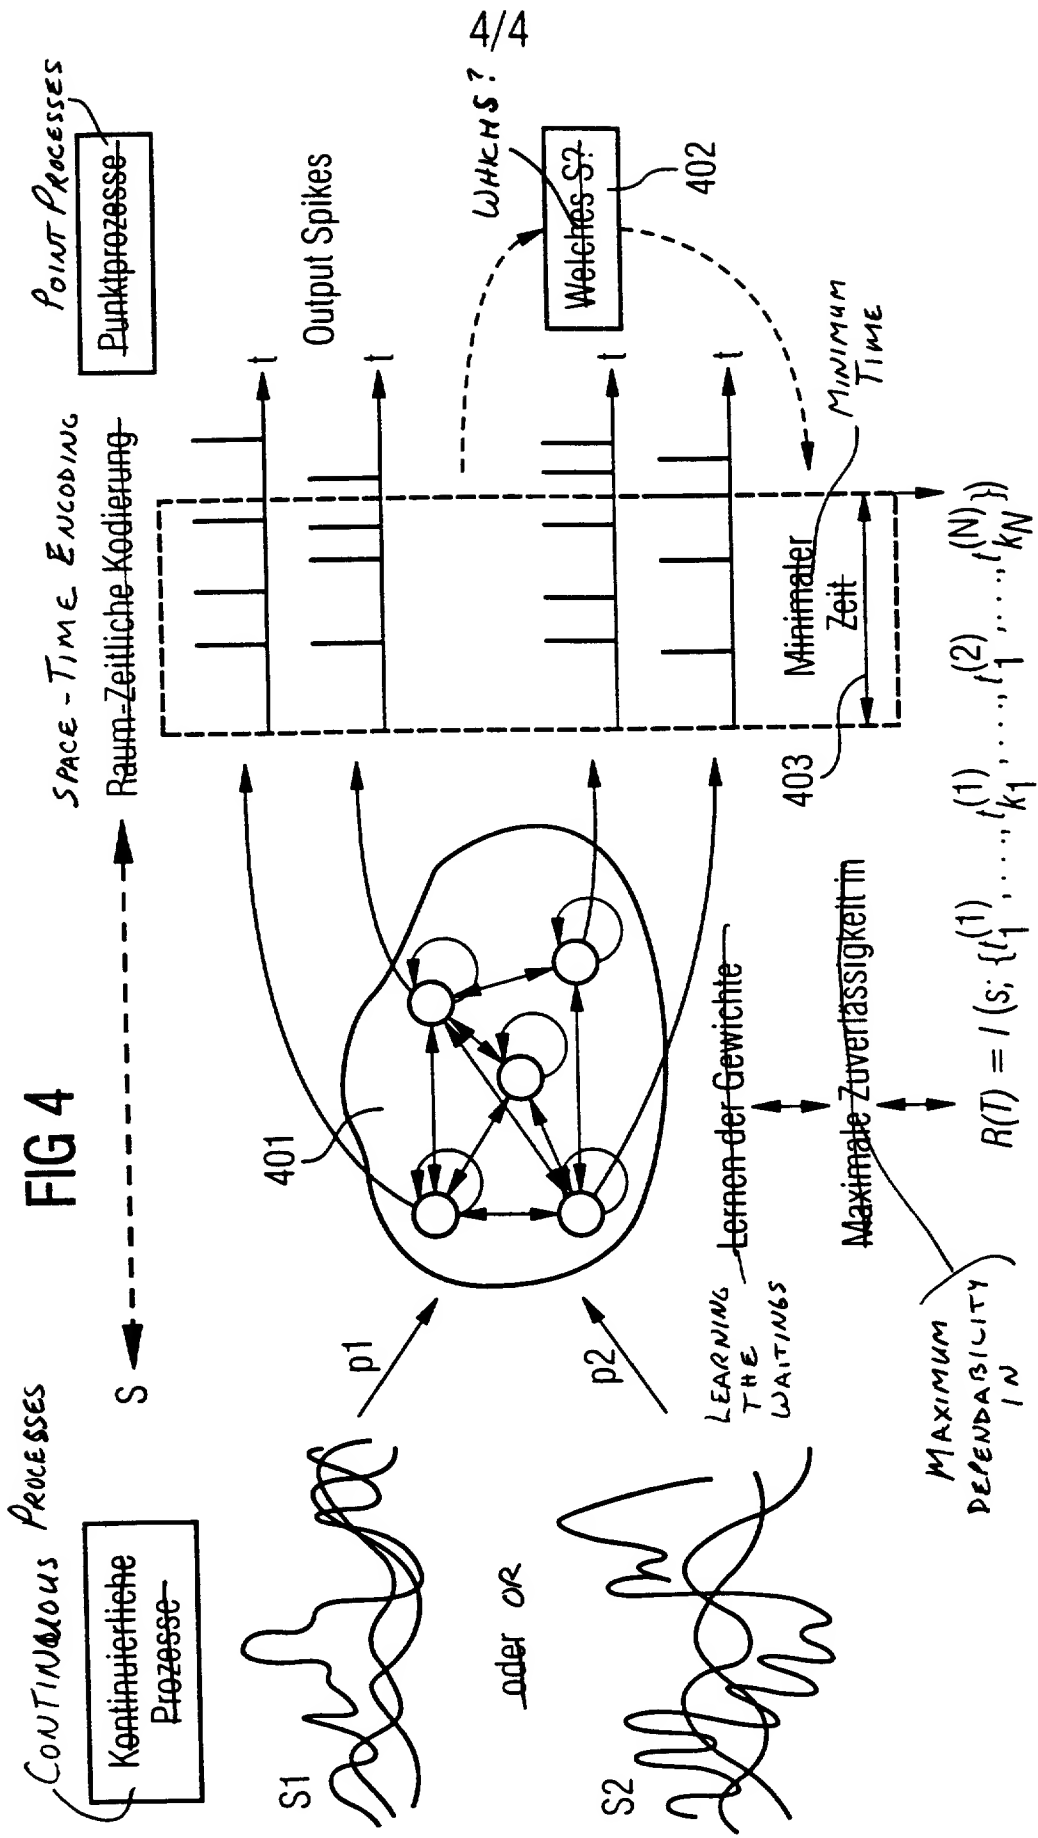

## German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

And I hereby appoint

Messrs. John D. Simpson (Registration No. 19,842), Lewis T. Steadman (17,074), William C. Stueber (16,453), P. Phillips Connor (19,259), Dennis A. Gross (24,410), Marvin Moody (16,549), Steven H. Noll (28,982), Brett A. Valiquet (27,841), Thomas I. Ross (29,275), Kevin W. Guynn (29,927), Edward A. Lehmann (22,312), James D. Hobart (24,149), Robert M. Barrett (30,142), James Van Santen (16,584), J. Arthur Gross (13,615), Richard J. Schwarz (13,472) and Melvin A. Robinson (31,870), David R. Metzger (32,919), John R. Garrett (27,888) all members of the firm of Hill, Steadman & Simpson, A Professional Corporation.

Telefongespräche bitte richten an:  
(Name und Telefonnummer)



Direct Telephone Calls to: (name and telephone number)

312/876-0200  
Ext. \_\_\_\_\_

Postanschrift:

Send Correspondence to:

**HILL, STEADMAN & SIMPSON**  
**A Professional Corporation**  
**85th Floor Sears Tower, Chicago, Illinois 60606**

Voller Name des einzigen oder ursprünglichen Erfinders: <b>DECO, Gustavo</b>	Full name of sole or first inventor: _____
Unterschrift des Erfinders 	Inventor's signature _____
Datum <b>14.6.99</b>	Date _____
Wohnsitz <b>D-85579 Neubiberg, Germany</b>	Residence _____
Staatsangehörigkeit <b>Italien</b>	Citizenship _____
Postanschrift <b>Hauptstr. 76</b>	Post Office Address _____
<b>D-85579 Neubiberg</b>	_____
<b>Bundesrepublik Deutschland</b>	_____
Voller Name des zweiten Miterfinders (falls zutreffend): <b>SCHÜRMANN, Bernd</b>	Full name of second joint inventor, if any: _____
Unterschrift des Erfinders 	Second inventor's signature _____
Datum <b>14.06.99</b>	Date _____
Wohnsitz <b>D-85778 Haimhausen, Germany</b>	Residence _____
Staatsangehörigkeit <b>Bundesrepublik Deutschland</b>	Citizenship _____
Postanschrift <b>Münchner Str. 35</b>	Post Office Address _____
<b>D-85778 Haimhausen</b>	_____
<b>Bundesrepublik Deutschland</b>	_____

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

## German Language Declaration

Prior foreign applications  
Priorität beansprucht

Priority Claimed

198 38 654.0    Germany    25. August 1998  
(Number)            (Country)            (Day Month Year Filed)  
(Nummer)            (Land)            (Tag Monat Jahr eingereicht)

☒    ☐  
Yes    No  
Ja    Nein

\_\_\_\_\_  
(Number)            (Country)            (Day Month Year Filed)  
(Nummer)            (Land)            (Tag Monat Jahr eingereicht)

☐    ☐  
Yes    No  
Ja    Nein

\_\_\_\_\_  
(Number)            (Country)            (Day Month Year Filed)  
(Nummer)            (Land)            (Tag Monat Jahr eingereicht)

☐    ☐  
Yes    No  
Ja    Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

\_\_\_\_\_  
(Application Serial No.)  
(Anmeldeseriennummer)

\_\_\_\_\_  
(Filing Date)  
(Anmeldedatum)

\_\_\_\_\_  
(Status)  
(patentiert, anhängig,  
aufgegeben)

\_\_\_\_\_  
(Status)  
(patented, pending,  
abandoned)

\_\_\_\_\_  
(Application Serial No.)  
(Anmeldeseriennummer)

\_\_\_\_\_  
(Filing Date)  
(Anmeldedatum)

\_\_\_\_\_  
(Status)  
(patentiert, anhängig,  
aufgeben)

\_\_\_\_\_  
(Status)  
(patented, pending,  
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden können, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

# Declaration and Power of Attorney For Patent Application

## *Erklärung Für Patentanmeldungen Mit Vollmacht*

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Verfahren zum Trainieren eines neuronalen  
Netzes, Verfahren zur Klassifikation einer  
Folge von Eingangsgrößen unter Verwen-  
dung eines neuronalen Netzes, neuronales  
Netz und Anordnung zum Trainieren eines  
neuronalen Netzes

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

deren Beschreibung

the specification of which

(zutreffendes ankreuzen)

(check one)

☒ hier beigefügt ist.

☐ is attached hereto.

☐ am \_\_\_\_\_ als

☐ was filed on \_\_\_\_\_ as

PCT internationale Anmeldung

PCT international application

PCT Anwendungsnummer \_\_\_\_\_

PCT Application No \_\_\_\_\_

eingereicht wurde und am \_\_\_\_\_

and was amended on \_\_\_\_\_

abgeändert wurde (falls tatsächlich abgeändert).

(if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: